

## SAFETOUCH™ CATH WINGED WITH INJECTION PORT

STERILE, SINGLE-USE CATHETER  
WITH SAFETY DEVICE FOR IV INFUSION



# SAFETOUCH™ CATH WINGED WITH INJECTION PORT

STERILE, SINGLE-USE CATHETER WITH SAFETY DEVICE FOR IV INFUSION

- Irreversible, passive safety mechanism
- Audible click confirms locking of safety device
- Does not require a change in puncture technique
- Radiopaque
- Ultra sharp three-beveled needle to minimize discomfort
- Siliconization of needle minimizes penetration and gliding force
- Injection port with universal luer fitting
- Flexible wings for easy grip
- Color-coded wings and hub to indicate gauge
- Transparent PUR catheter tube for quick visualization of blood in the flashback chamber to facilitate insertion
- Flashback in hub means the needle is correctly in the vein
- Flashback in catheter means the catheter is correctly in the vein
- Not made with latex, DEHP or PVC
- Available in 16-24 G
- IV infusion duration: hours to several days
- For use by healthcare professionals only

CE<sub>0123</sub>

Class IIa Medical Devices

Rule 7

MDD 93/42/ECC

UMDNS 18331

## PRODUCT COMPLIANCE

- CE-marked, Class IIa Medical Devices, Rule 7, MDD 93/42/EEC, UMDNS 18331
- Complies with the following norms, directives, and regulations:
  - ISO 594-1:1986
  - ISO 7864:1993
  - ISO 14644-4:2001
  - ISO 594-2:1998
  - ISO 10555-5: 2013
  - ISO 23908:2011
  - ISO 2859-1:1999 /AMD 2011
  - ISO 10993-10:2010
- Labels contain 26 languages

## MANUFACTURING DETAILS

**Legal manufacturer:** Nipro Corporation

**Country of origin:** Thailand

## STERILIZATION AND SHELF LIFE

### Sterilization

EtO (Ethylene oxide)



### Single-use only



### Indicator sticker


Each outer box (or shipping carton) contains a chemical indicator that indicates sterility. This indicator comes in the form of a [violet] sticker that turns [blue] when sterilized.

### Shelf life

5 years



# MATERIALS USED

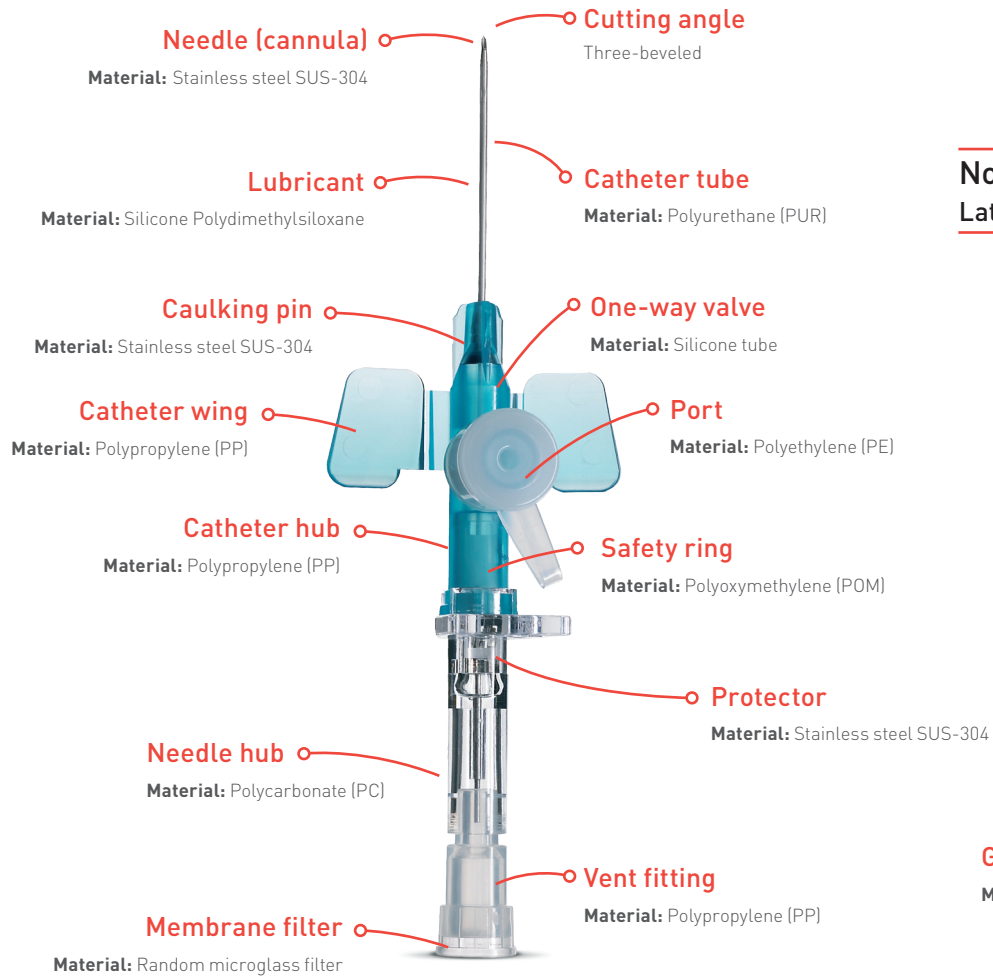

**Not made with  
Latex, DEHP or PVC**

**Glue  
Material: Acrylic resin**

## PRODUCT RANGE OVERVIEW

Reference code	Description	Color	Flow rate not less than
NIC-SF 1650P WP-ET	IV Cath SF 16Gx2" (1,7x50mm) PUR	Grey	≥ 162 ml/min
NIC-SF 1832PWP-ET	IV Cath SF 18Gx1 1/4" (1,3x32mm) PUR	Green	≥ 81 ml/min
NIC-SF 1850PWP-ET	IV Cath SF 18Gx2" (1,3x50mm) PUR	Green	≥ 81 ml/min
NIC-SF 2032PWP-ET	IV Cath SF 20Gx1 1/4" (1,1x32mm) PUR	Magenta	≥ 49 ml/min
NIC-SF 2050PWP-ET	IV Cath SF 20Gx2" (1,1x50mm) PUR	Magenta	≥ 49 ml/min
NIC-SF 2225PWP-ET	IV Cath SF 22Gx1" (0,8x25mm) PUR	Dark Blue	≥ 29 ml/min
NIC-SF 2232PWP-ET	IV Cath SF 22Gx1 1/4" (0,8x32mm) PUR	Dark Blue	≥ 29 ml/min
NIC-SF 2419PWP-ET	IV Cath SF 24Gx3/4" (0,7x19mm) PUR	Yellow	≥ 17 ml/min
NIC-SF 2425PWP-ET	IV Cath SF 24Gx1" (0,7x25mm) PUR	Yellow	≥ 17 ml/min

# PACKAGING DETAILS

Reference code	Gauge	Length	Inner box					Outer box					
	(G)	(mm)	Quantity	L (mm)	W (mm)	H (mm)	Weight (g)	Quantity	L (cm)	W (cm)	H (cm)	Weight (kg)	m <sup>3</sup>
NIC-SF-xxxxPWP-ET	xx	xx	50	160	100	157,5	6,740	2000	1024	342	349	11,840	0,1222

## Languages

26 languages on IFU and all levels of packaging:

English (EN), Bulgarian (BG), Czech (CS), Danish (DA), German (DE), Greek (EL), Spanish (ES), Estonian (ET), Finnish (FI), French (FR), Croatian (HR), Hungarian (HU), Italian (IT), Lithuanian (LT), Latvian (LV), Dutch (NL), Norwegian (NO), Polish (PL), Portuguese (PT), Romanian (RO), Russian (RU), Slovakian (SK), Slovenian (SL), Serbian (SR), Swedish (SV), Turkish (TR)

## Transport conditions

Closed and dry

## Storage conditions

Open the packaging only immediately before use to guarantee sterility.

## Label details

	Individual unit	Inner box	Outer box
Product name	✓	✓	✓
Product size	✓	✓	✓
Quantity (pieces)	—	✓	✓
REF	✓	—	—
LOT	✓	—	—
	✓	—	—
STERILE EO	✓	✓	✓
CE	✓	✓	✓

	Individual unit	Inner box	Outer box
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
EC REP	✓	✓	✓
	—	✓	✓
	✓	✓	✓

